


# XJ-300FR

Class "XJ" Stereo Amplifier

Model:  
**XJ-300FR**

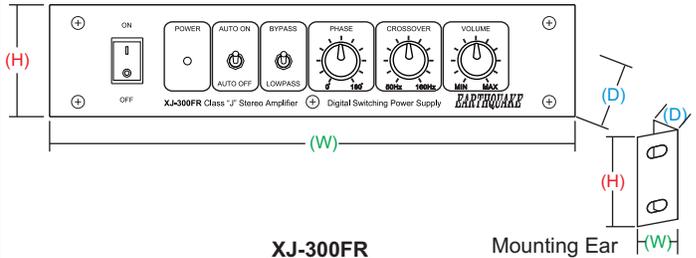

**XJ-300FR**

Mounting Ear

(H) Height w/out feet	1-3/4" (45mm)	1-7/8" (46mm)
(W) Width	8-1/2" (216mm)	1" (25mm)
(D) Depth	8" (203mm)	7/8" (22mm)



Optional Long Mounting Ears \$22/pair.

## OBJECTIVE

The new XJ-300FR amplifier packs more power and flexibility than any other amplifier. With endless configuration scenarios, the XJ-300FR amplifiers can be used as mono (bridged) amplifiers, 2.1 channel amplifiers, 2-channel amplifiers, 4/8/12 and 16 channel amplification with industry leading power density and efficiency.

With the XJ-300FR, it is possible to connect a third speaker between the 2 main channels. This matrix mono channel (aka "tri-mode" configuration) plays the combined content of both channels and is extremely useful for powering 2 satellites and a subwoofer.

The patented interlocking design allows you to link two XJ-300FR amplifiers side by side and mount them on the equipment rack using only 1U rack space. The XJ-300FR can also be mounted on the wall or inside the cabinet by fastening the short mounting ears to the preassigned holes on the side of the amplifier.

## INTENDED USE

- ✓ Contractors, Custom Installers & Retailers
- ✓ Home Theater
- ✓ Multi-channel Sound Systems
- ✓ Marine and RV Compatible
- ✓ Subwoofer Compatible

## SPECIAL FEATURES & HIGHLIGHTS

- Compact size: 8 1/2 in (W) x 9 1/2 in (D) x 1 7/8 in (H)
- Wall or rack mountable
- Class "XJ" Stereo Modular design
- Auto Signal/Music Sensing
- Built in room corrections and 0 - 180° phase adjustments
- RCA and USB inputs
- Volume control
- 50 – 160Hz built in crossover
- 110V/220V Selectable

## SPECIFICATIONS

**XJ-300FR**

Power Handling	2 X 110 WRMS (8-Ohm Stereo) 2 x 170 WRMS (4-Ohm Stereo)
Frequency Response	20Hz-20kHz
Total Harmonic Distortion	<0.08%
Finish	Black
<b>MSRP</b>	\$550.00 (long mounting ears \$22/pr)