


IMÄGE-X SERIES

In-Wall Speakers



	Imäge-5X	Imäge-6X	Imäge-8X	Imäge-C25X
(F) Frame	11" x 7-9/16" (279mm x 192mm)	12" x 8-11/16" (305mm x 221mm)	14" x 10" (356mm x 256mm)	17-5/8" x 8-5/8" (448mm x 219mm)
(C) Cut Out Hole	9-3/8" x 6-1/8" (238mm x 156mm)	10-3/4" x 7-1/4" (273mm x 184mm)	12-3/4" x 8 3/4" (324mm x 222mm)	16-3/8" x 7-3/8" (340mm x 187mm)
(M) Mounting Depth	2-3/4" (70mm)	3-1/8" (79mm)	3-9/16" (90mm)	3" (75mm)

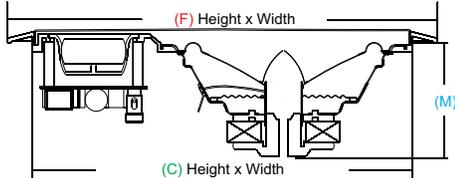

OBJECTIVE

The Imäge-X 2-Way in-wall & center speakers are designed to deliver unmatched quality and value. Their ability to reproduce the full ranges of music with no strain or distortion earn them high marks in multitasking.

Their smooth reproduction of music with no overhang is the product of an elaborate signal processing network that is so precise, it allows for seamless sound transition. The Imäge speaker system is designed to channel the impact of special effects onto viewers in crystal-clear, subtle fashion that makes listeners become part of the scene.

Imäge-X speakers gently lend themselves to the interior of any home, they bring the excitement and the drama of crisp clean music and theater to your kitchen, bedroom, or home theater.

INTENDED USE

- ✓ Bandwidth: Full Range
- ✓ Home Theater/5.1 & 2-Channel/Music Systems
- ✓ New Construction & Retrofit Applications
- ✓ Plasma Install Flush In-wall Home Theater
- ✓ Can Be Used in Both Yachts and RV's

SPECIAL FEATURES & HIGHLIGHTS

- High sensitivity and power handling (another way where Earthquake delivers value and performance in one low cost package)
- Easy install spring loaded terminals
- Paintable rust-proof aluminum grilles for superior protection and job flexibility
- Swiveling 1" silk dome, neodymium tweeters
- Easy adjust bass/treble trim
- Turn-N-Lock installation for safe, efficient and professional installs
- Poly injection composite drivers for smooth wide range response with no distortion
- Long life, moisture resistant materials for safe use in kitchens, bathrooms and atriums
- Style easily integrates with Earthquake IQ and Imäge in-ceiling speakers and Thor in-wall subwoofers

SPECIFICATIONS

	Imäge-5X	Imäge-6X	Imäge-8X	Imäge-C25X
Power Handling	120 Watts	175 Watts	250 Watts	250 Watts
Frequency Response	65Hz - 21Hz	52Hz - 21kHz	52Hz - 21kHz	50Hz - 21kHz
Woofer	5-1/4"	6-1/2"	8"	5-1/4" x Two
Tweeter	1" (25mm) silk dome			
MSRP	\$235.00/pr	\$325.00/pr	\$389.00/pr	\$299.00/pc