

Specification

Nominal Basket Diameter	8", 203.2mm
Nominal Impedance	4-Ohms
Power Rating	80 Watts
Resonance	68Hz ±15%
Usable Frequency Range	68Hz - 10kHz
Sensitivity	97 dB
Magnet Weight	43.7 oz.
Voice Coil Diameter	2" 50.8mm

Thiele & Small Parameters

Resonant Frequency (fo)	87.763 Hz
DC resistance (Re)	3.800 Ohms
Coil Inductance (Le)	272.716 mH
Mechanical Q (Qms)	6.324
Electromagnetic Q (Qes)	0.330
Total Q (Qts)	0.313
Compliance Equivalent Volume (Vas)	21.004 liters/ft3
Mechanical Compliance of Suspension (Cms)	316.733mm/N
BL Product (BL)	8.002 T-M
Diaphragm Mass (Mmd)	16.843 grams
Maximum Linear Excursion (Xmax)	4 mm
Surface Area of Cone (Sd)	218.424 sqM



Mounting Information

Recommended Enclosure Volume	
Sealed	liters/ ft3
Vented	liters/ ft3
Overall Diameter	8 6/25", 209.5mm
Cut Out Diameter	7 2/25", 180mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	.19" x .35", 5 x 9mm
Depth	3 51/100", 89.3mm


Materials of Construction

Copper voice coil
 Polyimide former
 Ferrite magnet
 Vented and extended core
 Stamped steel basket
 Paper cone
 Cloth surround
 Solid composition paper dust cap

EARTHQUAKE
SOUND
 Sound That Will Move You.

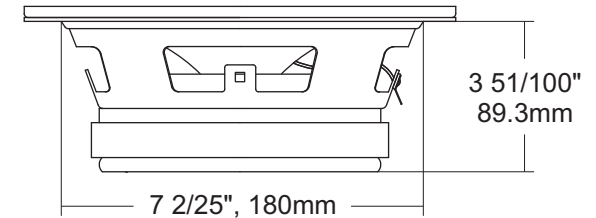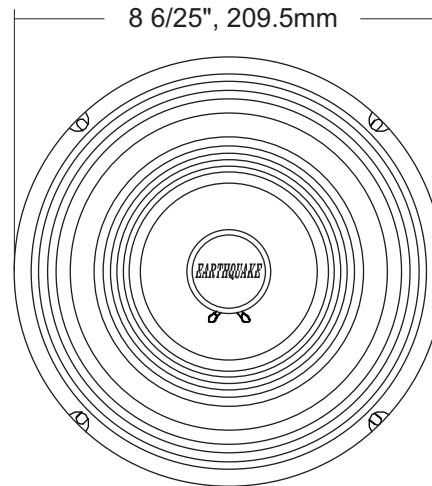

Earthquake EQ8 Pro Audio Series

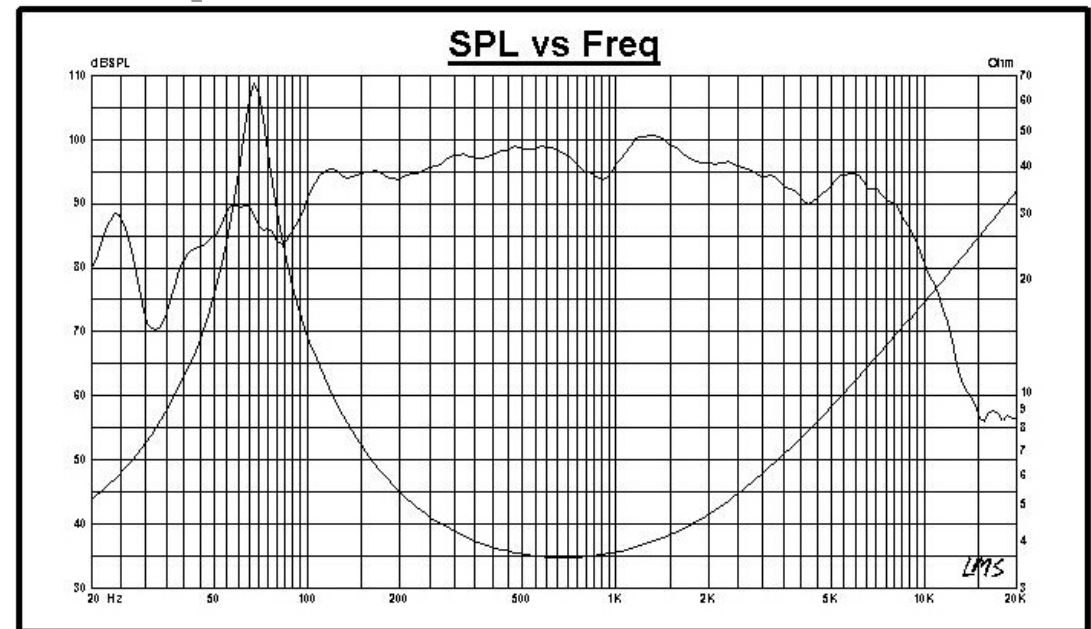

Earthquake Sound Corporation
 2727 McCone Avenue • Hayward, CA 94545 • phone: 800-576-7944
 fax: 510-732-1095 • www.earthquakesound.com