

Extending on the MiniMe DSP series of subwoofers, the all-new DSP 15 home subwoofer utilizes Earthquake's advanced Class D circuitry with over 90% efficiency with the added advantage of DSP control through mobile devices. Complicated and professional room tuning is made possible right at your fingertips through a mobile app allowing the user to tune the MiniMe DSP 15 precisely to the room it is placed in. Like the 10 and 12-inch models, the MiniMe DSP 15 offers users the same excellent performance and features with the added ben-

efits of fully balanced XLR inputs and outputs, 1000 watts of peak power output, and a redesigned 15-inch SLAPS passive radiator to permit this MiniMe to dig deeper for outstanding low-frequency reproduction down to 18Hz. The DSP 15 is quite possibly the best MiniMe ever produced and is sure to serve your room with massive bass for the utmost sound quality and intense room-rumbling sound effects. Depending on user listening preferences, the MiniMe DSP 15 is available in both sealed front firing and passive radiator tuned versions.



## FLATTEN THE CURVE AT HOME WITH MINIME DSP 15

### FEATURES

- 15" premium high-EMF XLT active driver
- 15" mass tuned SLAPS passive bass radiator
- 1000W high-efficiency Class D amplifier
- Built-in Digital Signal Processor (DSP) for enhanced bass performance
- Up to 48dB/Octave available within the application
- Double the radiating surface for impactful response (P-15 only)
- Auto signal sensing turn on and standby mode
- Luxurious high gloss black piano lacquer finish
- Operation status LED indicator
- Balanced XLR input with Mono DSP output
- Low level RCA inputs with Mono DSP outputs
- Selective variable crossover
- Remote and remote eye included
- Auto room correction
- SHS (Sub-harmonic Synthesizer)




## MINIME DSP P-15 & FF-15

### SPECIFICATIONS

MODEL	P-15
Enclosure Type	Ported with Passive Radiator
Amplifier Power	1000 Watts MAX
Drivers	15" Active 15" SLAPS Passive Radiator
Frequency Response	18Hz-115Hz
Crossover Frequency	40Hz-160Hz
Inputs/Outputs	Low Level RCA Inputs & Outputs Fully Balanced XLR Input Mono DSP XLR Output
Enclosure Finish	Glossy Black Piano Lacquer
Dimensions (HxWxD)	18" x 17.6" x 21.25"
Includes grilles, amplifier, and feet	458mm x 448mm x 540mm

MiniMe DSP P-15


**MSRP: \$2,299.00**

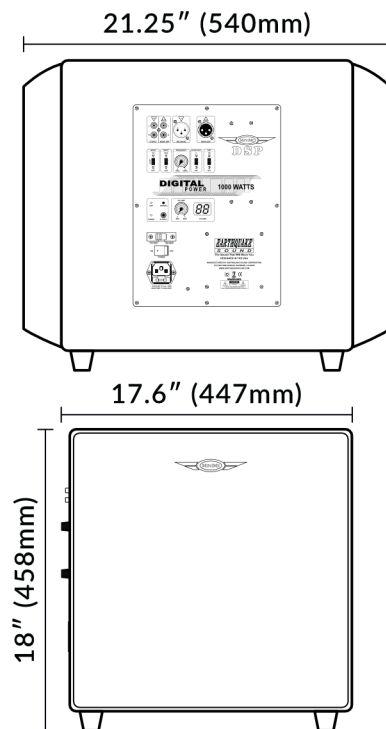

MODEL	FF-15
Enclosure Type	Sealed Front Firing
Amplifier Power	1000 Watts MAX
Drivers	15" Active
Frequency Response	18Hz-115kHz
Crossover Frequency	40Hz-160Hz
Inputs/Outputs	Low Level RCA Inputs & Outputs Fully Balanced XLR Input Mono DSP XLR Output
Enclosure Finish	Glossy Black Piano Lacquer
Dimensions (HxWxD)	18" x 17.6" x 19"
Includes grilles, amplifier, and feet	458mm x 448mm x 483mm

MiniMe DSP FF-15

**MSRP: \$2,199.00**

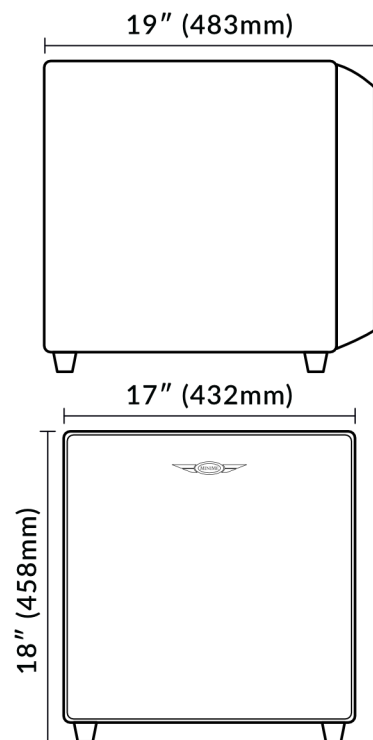

**Earthquake Sound Corporation**

2727 McCone Avenue, Hayward, CA 94545 • [www.earthquakesound.com](http://www.earthquakesound.com) • 510-732-1000

©2025 Earthquake Sound Corporation

All copyrighted, trademarked, and patented elements mentioned herein are the sole property of Earthquake Sound Corporation.