

# EARTHQUAKE


## SOUND

The Sound That Will Move You

# Image-83X

## 3-Way In-Wall Speaker

Model:  
Image-83X

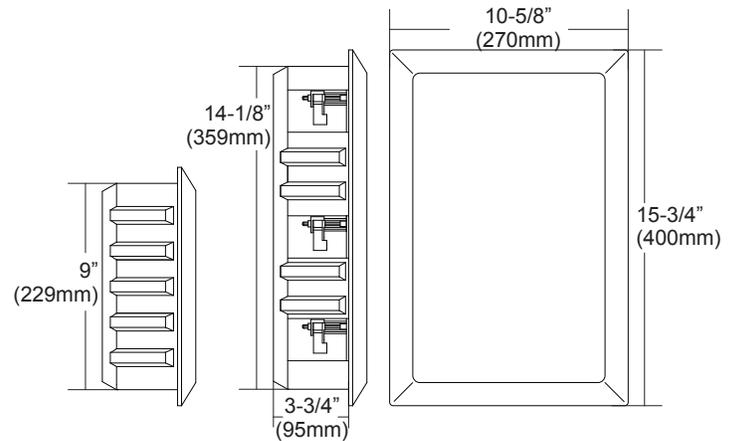

### INTENDED USE

- ✓ Bandwidth: Full Range
- ✓ Home Theater & 2-Channel/Music Systems
- ✓ New Construction & Retrofit Applications
- ✓ Plasma Install Flush In-wall Home Theater
- ✓ Can Be Used in Both Boats and RV's

### SPECIAL FEATURES & HIGHLIGHTS

- 1" swiveling silk dome neodymium tweeter
- Elliptical 4 x 6" glass fiber cone mid-range
- 8" glass fiber cone woofer with corrective phase plug
- Bass reflex design
- Removable back box
- Switched  $\pm$  3dB woofer level adjustment
- Switched  $\pm$  3dB tweeter level adjustment
- Easy-install Turn-N-Lock™ mechanisms
- Woofers' are back-mounted on the baffle for improved isolation from the local environment
- High temperature voice coil wire and adhesives
- 8-ohm impedance, makes an easy load for any amplifier or receiver

### OBJECTIVE

The Image-83X brings a new dimension of reality and convenience to a flush-mount design, these three-way in-wall surround speakers feature a unique adjustable tweeter that allows custom designers to create enveloping sound fields and localized effects without disrupting a home's decor. While a 4" x 6" carbon fiber cone mid-range elliptical driver delivers a wider dispersion of sound and more vocal clarity. Tonal adjustments can be made in  $\pm$ 3dB increments for even the most peculiar tastes. For bass, the Image-83X has a high quality 8" carbon fiber cone subwoofer with a phase plug, for the most precise and accurate bass that you have ever heard from an in-wall.

Designed for surround use in 5.1 and 2-channel systems, the Image-83X employs an 8" carbon fiber cone subwoofer a single 1" neodymium tweeter with silk dome and enhanced high frequency plus a 4" x 6" carbon fiber cone mid-range. Because of it's adjustable tweeter, high precision mid-range, expanded surround woofer and back box, the Image-83X out performs conventional designs by maximizing diffusion, clarity and efficiency while minimizing room interaction that blur sonic truth.

### SPECIFICATIONS

Image-83X	
Power Handling	500 Watts
Frequency Response	30Hz - 22kHz
Woofer	8"
Mid-Range	4" x 6"
Tweeter	1"
<b>MSRP</b>	\$450/piece